
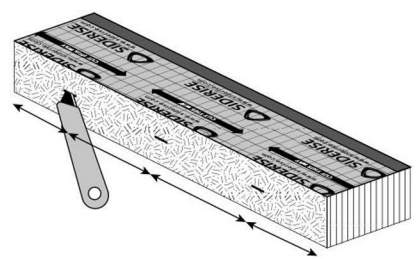
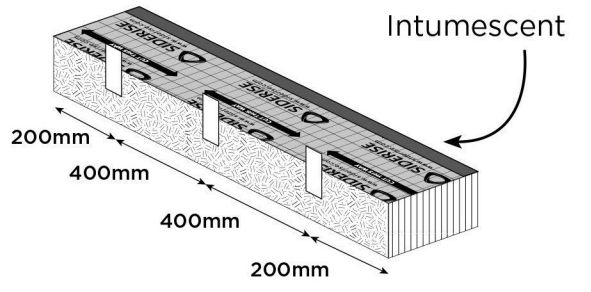

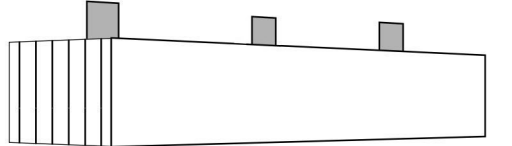
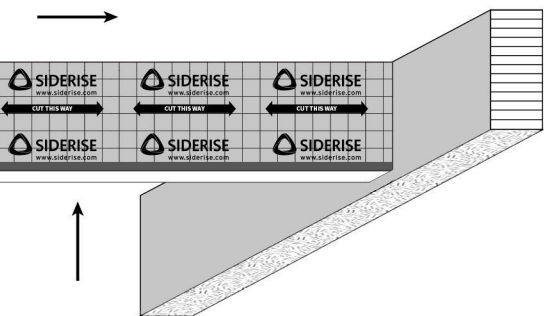
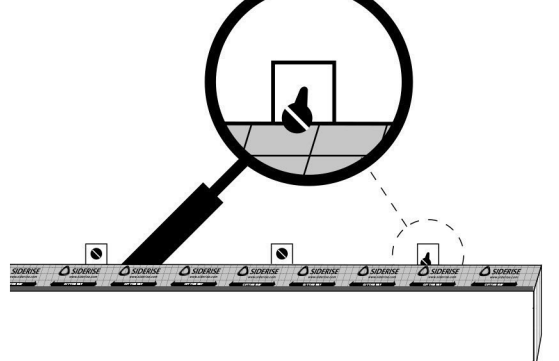
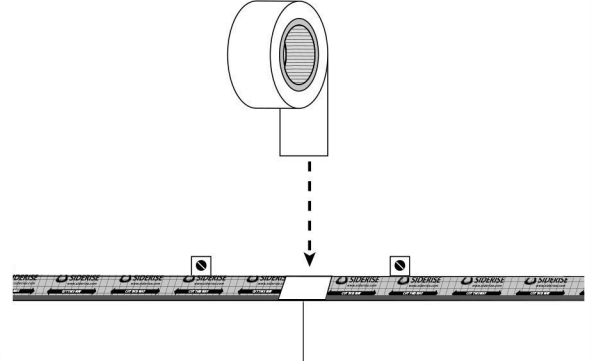
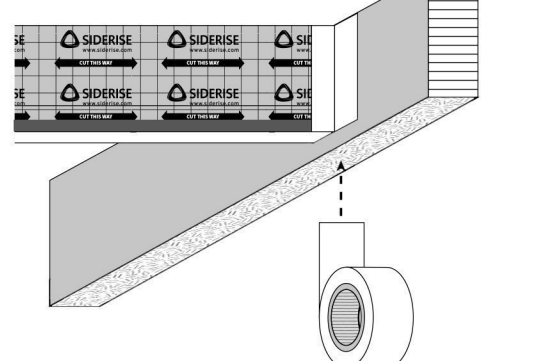
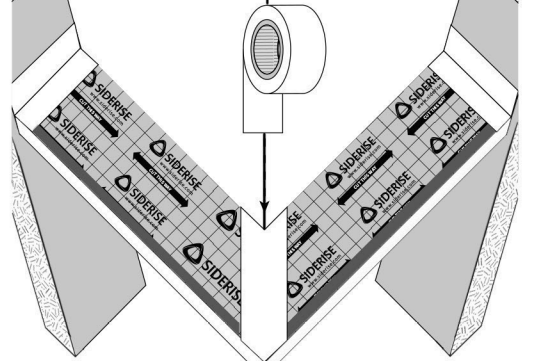
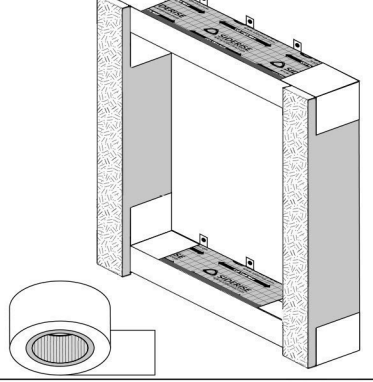
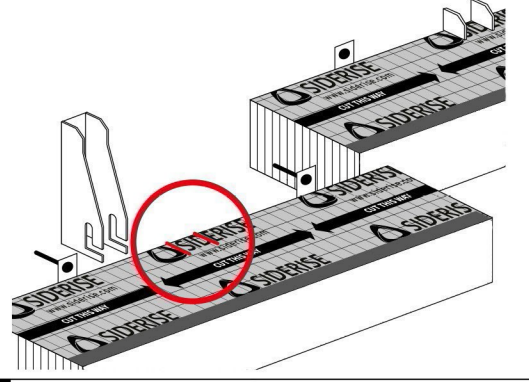
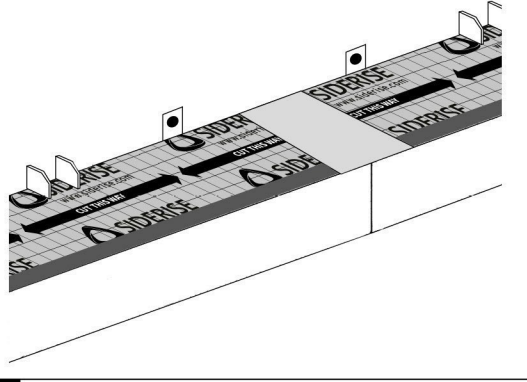


<p><b>1</b> You need: Siderise® Fixing Brackets, Siderise® Foil Tape RFT 120/45, suitable non-combustible mechanical fixings appropriate to substrate, supplied by contractor.</p>	<p><b>2</b> <b>Trimming on site</b> - tools required: marker, tape measure, pliers, knife and saw.</p>	<p><b>3</b> <b>Trimming on site</b> - EWI barriers are supplied pre-cut. If trimming required measure and mark the barrier: size of the void minus air gap.</p>	<p><b>4</b> <b>Trimming on site</b> - EWI barriers are supplied pre-cut. If trimming required first use a sharp knife to cut through the foil facings on both sides.</p>	<p><b>5</b> <b>Trimming on site</b> - EWI barriers are supplied pre-cut. If trimming required, after using the sharp knife, cut the stone wool with a saw being careful not to rip the foil facing.</p>
				
<p><b>6</b> 3 brackets are needed for each EWI barrier. Manually fold brackets to 90°.</p>	<p><b>7</b> Make 3 horizontal incisions at 400mm intervals. This will make it easier to push the bracket into the barrier.</p>	<p><b>8</b> Insert the three brackets into the EWI barrier. Bracket flanges must be facing upwards as shown above.</p>	<p><b>9</b> Push the brackets 75% into the barrier.</p>	<p><b>10</b> The barrier is ready to install.</p>
				
<p><b>11</b> <b>Installing Barrier</b> - Hold barrier against the wall. Make sure the barrier is tightly abutting the previous barrier or vertical barrier.</p>	<p><b>12</b> <b>Installing Barrier</b> - Mechanically fix the brackets to the wall, ensuring the barrier is tightly abutted to the barriers next to it.</p>	<p><b>13</b> <b>Installing Barrier</b> - Seal joints with Siderise foil tape on the top side. Ensure tape does not extend onto front face / intumescent of the barrier.</p>	<p><b>14</b> Where EWI and vertical EW barriers meet ensure that they are tightly abutted. Seal corners and junctions on the top side with Siderise foil tape. Vertical EW barrier must always take priority.</p>	<p><b>15</b> Carefully cut barrier to ensure mitred edges at corners to maintain a continuous line of intumescent, ensure they are tightly abutted and apply Siderise foil tape.</p>
			<p style="text-align: center;">SCAN / CLICK HERE FOR</p>  <p style="text-align: center;">FURTHER INSTRUCTIONS</p>	
<p><b>16</b> When installing around windows or doors every internal and external joint where vertical EW and horizontal EW barriers meet, must be sealed with Siderise foil tape.</p>	<p><b>17</b> <b>Masonry Supports</b> - Make incisions in the horizontal barrier to accommodate the masonry support bracket.</p>	<p><b>18</b> <b>Masonry Supports</b> - Ensure all of the barrier is tight around the masonry support, any gaps to be packed with offcuts of Siderise barrier and sealed with Siderise RFT Foil Tape.</p>		